


How to replace the fascia

Step 1: Take out the bolt from the side burner injector bracket.




Step 2: Take out the 4 bolts on either side of the side burner shelf, as below.

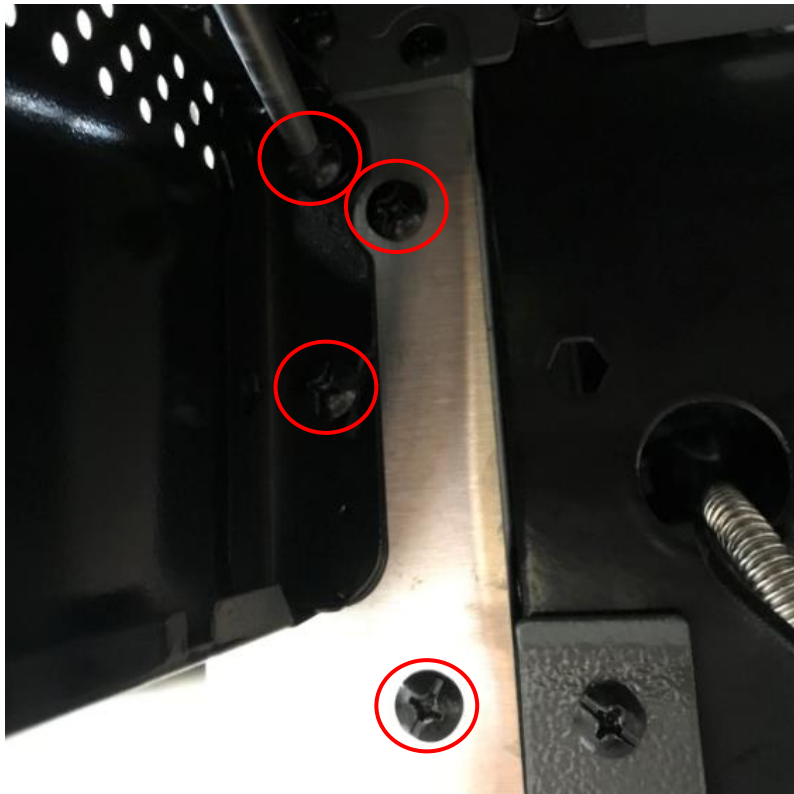




Step 3: Loosen the front fixing screws 3mm on either side of the side burner shelf, as the circles show.

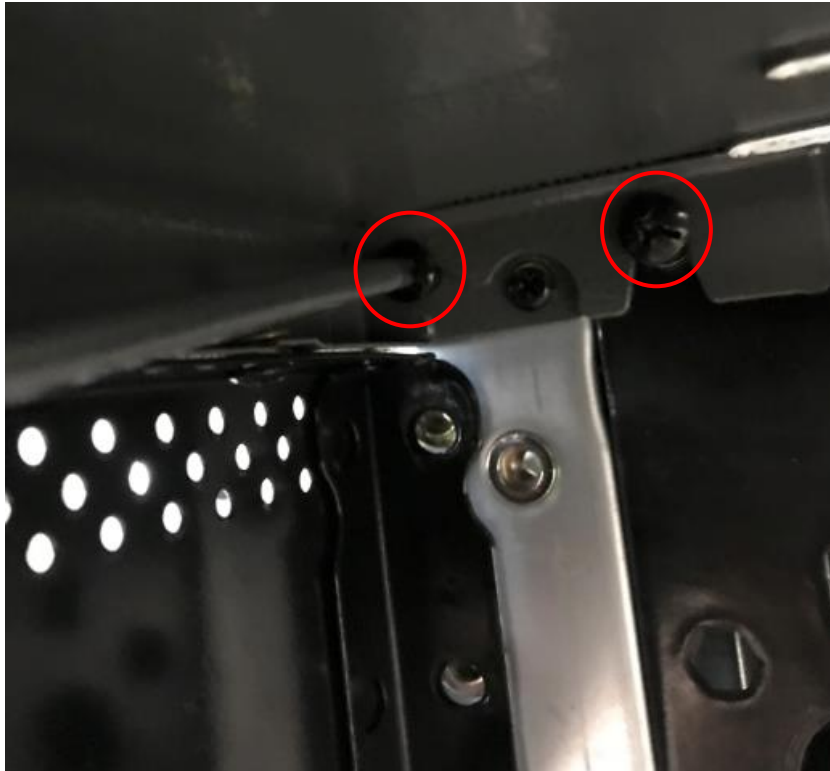

Step 4: Take out the 4 screws as the picture circles on the left side shelf.

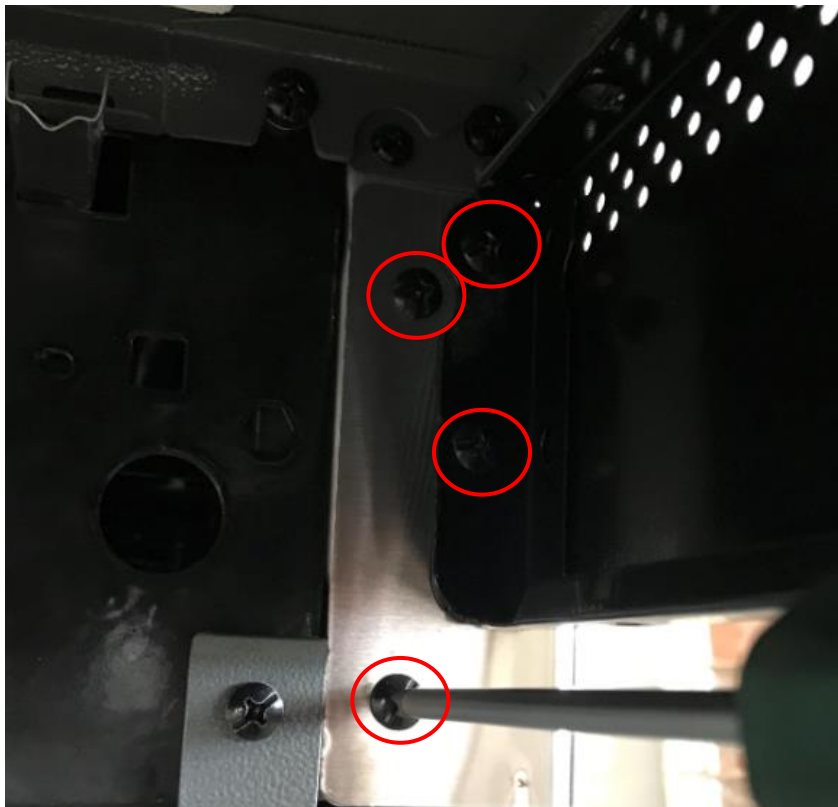

Step 5: Loosen the front fixing screws 3mm on the left side shelf, as the circles show.




Step 6: Gently draw the fascia out as shown in the following image.



Step 7: Take out all the knobs.



Step 8: Remove all screws from the knob bezel.

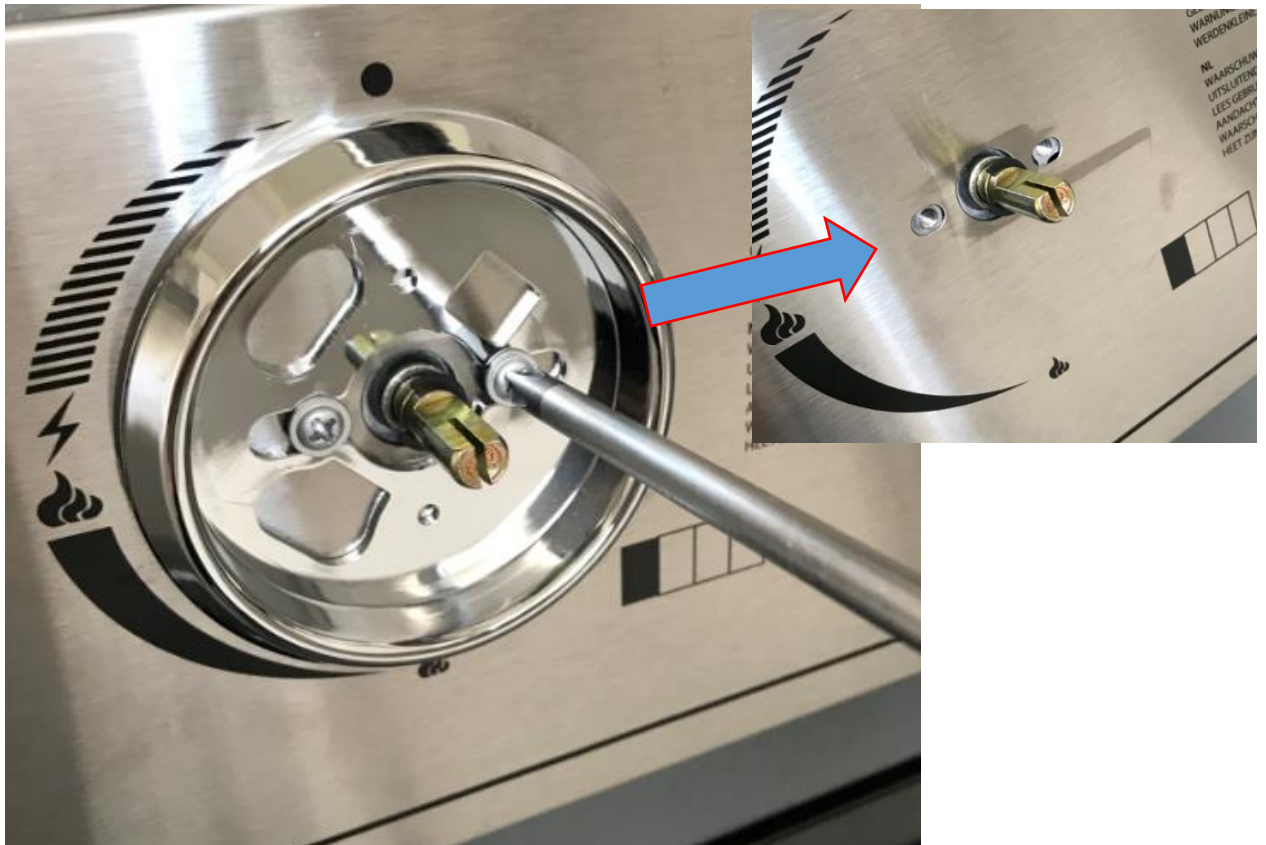



Step 9: Replace with a new fascia.



Step 10: Reverse steps above to install the parts back. Please pay attention when installing the fascia, so each injector on the manifold aims at the burner inlets.

